

150m RG6 Siamese Tri-shield Coaxial Cable Reel

06MM-E6TS


E6TS is a siamese RG6 75 Ohm tri-shield coaxial cable for free-to-air and domestic Foxtel pay-TV systems. Siamese cable helps simplify the installation by allowing you to pull two cables together to each outlet location and can be split to cater for FTA and Foxtel separately. Alternatively can be solely used for Foxtel multiswitch systems to provide dual cable for Foxtel IQ outlets. Available in 150m reels, E6TS is a 3GHz rated low loss coaxial cable with a copper-clad steel centre conductor for durability and four shielding layers to guarantee maximum signal protection and stability.

Features and Benefits

- » An RG6 metre marked cable with tri-shielding and is siamese
- » Sold in a 150 metre reel
- » Suitable and approved for pay and digital TV
- » Foxtel (F30441) and Optus (4868) approved

Technical Data 06MM-E6TS

Construction		
Inner Conductor	Material	Copper Clad Steel Wire
	Diameter (mm)	1.02±0.01
Insulation	Material	Physically Foamed PE
	Diameter, mm	4.57±0.15
Outer Conductor	1st shield	Bonded Al/PET/Al Tape 4.78 ±0.13
	2nd shield	Al-Mg Alloy Wire Braid
	3rd shield	Non-bonded Al/PET/Al Tape
Jacket	Material	PVC
	Diameter, mm	7.06±0.20
Cross Section	Diameter, mm	Height: 0.5±0.30
		Width: 0.5±0.30
Mechanical Properties		
Bending	Single	35
Radius, mm	Typical	70
Pulling Strength, N		200
Adhesion Force, N		>22
Electrical Properties		
Impedance, Ω		75±3
DCR of Inner conductor, Ω /km		102.0
DCR of outer conductor, Ω /km		24.10
Capacitance, pF/m		54
Propagation Velocity, %		82

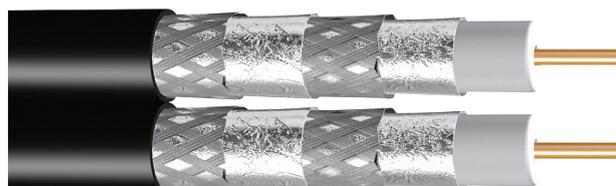

DC Breakdown Voltage, kV	5.0
Insulation Resistance, MΩ•km	>1x10 ⁴
Screening Attenuation, dB	>95@5-1000MHz
	>85@1000-2000MHz
	>75@2000-3000MHz
Attenuation	
Frequency MHz	Max. attenuation @20°C, dB/100m
5MHz	1.90
55MHz	5.25
211MHz	10.00
250MHz	10.82
270MHz	11.04
300MHz	11.64
330MHz	12.26
350MHz	12.63
400MHz	13.61
450MHz	14.43
500MHz	15.29
550MHz	16.08
600MHz	16.73
750MHz	18.54
870MHz	20.04
1000MHz	21.49
1300MHz	24.49
1450MHz	25.89
1750MHz	28.67
2150MHz	31.79
2600MHz	35.30
2832MHz	37.74
3000MHz	38.84
Return Loss, dB	
5-3000MHz	≥20
Standards	
Operation	-40~+70°C
UL 1581 UV Resistance 720h	Compliant
2011/65/EU	Compliant