

Wi-Fi 6 Outdoor Directional Access Point AX6000 802.11ax Dual Bands 5.95 Gbps with SFP Fibre Port and 2.5 GbE RG-RAP6260(H)-D




The RG-RAP6260(H)-D Wi-Fi 6 access point is a high-powered outdoor directional dual-band access point designed for use in scenarios such as mining camps, caravan parks, town centres, villas, parks, scenic spots, and any other suitable outdoor applications to provide high-speed Wi-Fi to multiple end users. The RG-RAP6260(H)-D features a 2.5 GbE Base-T port for super high-speed connectivity and an inbuilt GbE SFP fibre port, allowing long-range deployments from the data centre, up to 20km over single-mode fibre.

3-Year Manufacturer's Warranty

Refer to website for full terms & conditions

Features and Benefits

- » Outdoor high-range WiFi-6 (802.11ax) supporting speeds up to 5950 Mbps (Concurrent high-speed wireless access of 1147 Mbps at 2.4GHz and 4803 Mbps at 5Ghz)
- » 2.5 GbE Base-T port for super high-speed connectivity plus a built-in gigabit SFP port supporting up to 20km transmission from the data centre over single-mode fibre for long-range deployment
- » Lifetime free Ruijie Cloud management: Remote fault alarm, one-click optimizing and maintenance on Ruijie Cloud app
- » The AP19 supports Layer 2 roaming, Layer 3 roaming 802.11k/v/r and AI roaming
- » IP68 rated and operating temperature to 65 degrees Celsius makes the AP19 perfect for use in outdoor settings like mining camps, caravan parks, villas, town centres, sports grounds and parks, etc
- » Compliant with 802.11a/b/g/n/ac/ax Wi-Fi protocols

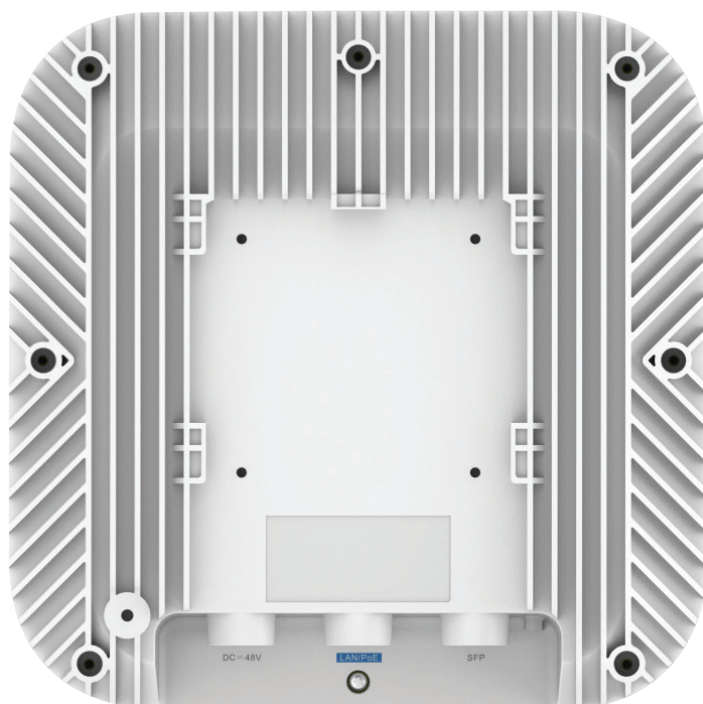

Wi-Fi 6 Outdoor Directional Access Point AX6000 802.11ax Dual Bands 5.95 Gbps with SFP Fibre Port and 2.5 GbE

RG-RAP6260(H)-D



Hardware Specifications		
Wi-Fi Protocols	5 GHz	Wi-Fi 4: IEEE 802.11a/n Wi-Fi 5: IEEE 802.11ac Wave2 Wi-Fi 6: IEEE 802.11ax
	2.4 GHz	Wi-Fi 4: IEEE 802.11b/g/n Wi-Fi 6: IEEE 802.11ax
Operating Frequency Bands (country-specific restrictions apply)	5 GHz	5.150 GHz to 5.350 GHz, 5.470 GHz to 5.725 GHz, 5.725 GHz to 5.850 GHz
	2.4 GHz	2.400 GHz to 2.4835 GHz
Spatial Streams	5 GHz	4 spatial streams, 4x4 MIMO
	2.4 GHz	4 spatial streams, 4x4 MIMO
Antenna	Omni-directional	No(Directional)
	5 GHz Antenna Gain	9.0dBi
	2.4 GHz Antenna Gain	10.0dBi
Channel Width	5 GHz	Auto/20/40/80/160 MHz
	2.4 GHz	Auto/20/40 MHz
Data Rate	Max Throughput	5950Mbps
	5 GHz	4803Mbps
	2.4 GHz	1147Mbps
Max. Transmit Power	5 GHz	≤400mW(26dBm)
	2.4 GHz	≤400mW(26dBm)
Wi-Fi Coverage	Optimal Coverage	N/A
	Max. Wi-Fi Coverage Range (6 GHz)	N/A
	Max. Wi-Fi Coverage Range (5 GHz)	1000m
	Max. Wi-Fi Coverage Range (2.4 GHz)	0
Modulation	Modulation	OFDM: BPSK@6/9 Mbps, QPSK@12/18 Mbps, 16QAM@24 Mbps, 64QAM@48/54 Mbps DSSS: DBPSK@1 Mbps, DQPSK@2 Mbps, and CCK@5.5/11 Mbps MIMO-OFDM: BPSK, QPSK, 16QAM, 64QAM, 256QAM and 1024QAM OFDMA

Wi-Fi 6 Outdoor Directional Access Point AX6000 802.11ax Dual Bands 5.95 Gbps with SFP Fibre Port and 2.5 GbE

RG-RAP6260(H)-D



Receiver Sensitivity	Receiver Sensitivity	11b: -91dBm(1Mbps), -88dBm(5.5Mbps), -85dBm(11Mbps) 11a/g: -89dBm(6Mbps), -80dBm(24Mbps), -76dBm(36Mbps), -71dBm(54Mbps) 11n: -83dBm(MCS0), -65dBm(MCS7), -83dBm(MCS8), -65dBm(MCS15) 11ac: 20MHz: -83dBm(MCS0), -57dBm(MCS9) 11ac: 40MHz: -79dBm(MCS0), -57dBm(MCS9) 11ac: 80MHz: -76dBm(MCS0), -51dBm(MCS9) 11ac: 160MHz: -76dBm(MCS0), -50dBm(MCS9) 11ax: 20MHz: -85dBm(MCS0), -58dBm(MCS11) 11ax: 40MHz: -82dBm(MCS0), -54dBm(MCS11) 11ax: 80MHz: -79dBm(MCS0), -52dBm(MCS11) 11ax: 160MHz: -76dBm(MCS0), -49dBm(MCS11)
Dimensions (W x D x H)	Dimensions (excluding mounting kits)	298 mm x 298 mm x 65 mm (11.73 in. x 11.73 in. x 2.56 in.)
Weight	excluding mounting kits	≤ 3.5 kg (7.72 lbs.)
Service Ports	Number of 10/100/1000BASE-T Ports	0
	Number of 10/100/1000/2500BASE-T Ports	1 (supports 802.3bt PoE)
	Number of 1 Gbps Optical Ports (SFP)	1
	Number of 10 Gbps Optical Ports (SFP+)	0
Power Supply	DC(Local Power)	Yes(48V/1A)
	DC Port Dimensions	Outer Diameter: 5.5 mm Inner Diameter: 2.1 mm Length: 10 mm
	802.3af	No
	802.3at	Yes(The rate will decrease. The maximum rate is 573 Mbps at 2.4 GHz and 2401 Mbps at 5 GHz)
	802.3bt	Yes
	48 V passive PoE	Yes(60W)
PoE Out	Max. PoE Wattage by PSE	No
Power Consumption	Power Consumption	< 40W
Power Adapter	Power Adapter	No
Buttons	Button	1 x Factory reset
LEDs	LEDs	1 x System LED indicator(blue)
Environment	Operating Temperature	-30°C to +65°C (-22°F to +149°F)
	Storage Temperature	-40°C to +85°C (-40°F to +185°F)
	Operating Humidity	0% to 100% (non-condensing)
	Storage Humidity	0% to 100% (non-condensing)
Mounting	Ceiling-mount	No
	Wall-mount	Yes
	Pole-mount	Yes

Wi-Fi 6 Outdoor Directional Access Point
AX6000 802.11ax Dual Bands 5.95 Gbps with
SFP Fibre Port and 2.5 GbE
RG-RAP6260(H)-D



Compliance Standards	Health	EN IEC 62311:2020
	Spectrum	EN 300 328 V2.2.2 EN 301 893 V2.1.1 EN 300 440 V2.2.1
Weatherproof	IP Rating	IP68
	Lightning Protection/Surge	±4 kV
Software Specifications		
Operating Mode (AP Mode and Router Mode)	Router Mode	Yes
	AP Mode	Yes
WLAN	Recommended Number of Clients	BW160 11AX: 16(2.4G)+114(5G)=130 BW80 11AX: 16(2.4G)+84(5G)=100 11AC: 16(2.4G)+64(5G)=80
	Max. Number of SSIDs	8
	Radio-based STA Limit	Yes
	Layer 2 Client Isolation	Yes
	OFDMA Subcarrier	Yes
	OFDMA	Yes
	Target Wake Time (TWT)	No
	Wi-Fi Multimedia (WMM)	Yes
	802.1Q VLAN	Yes
	Multi-Link Operation (MLO)	No
	4K-QAM	No
	Same SSID for Different VLANs	Yes
Roaming	802.11k/v	Yes
	802.11r	Yes
	Layer 2 Roaming	Yes
	Layer 3 Roaming	Yes
	AI Roaming	Yes
Security	PSK Authentication	Yes
	Static Blocklist and Allowlist	Yes
	WPA (TKIP), WPA2 (AES), and WPA-PSK	Yes
	OWE (Enhanced Open) WPA3-SAE WPA2-PSK/WPA3-SAE	Yes
	DHCP Snooping	Yes
	802.1X	Yes
	ARP Check	No
	IP Source Guard	No
	LLDP	No
	Static ARP Binding	Yes
	Proxy ARP	No
	Ping	Yes
	Traceroute	Yes

Wi-Fi 6 Outdoor Directional Access Point
AX6000 802.11ax Dual Bands 5.95 Gbps with
SFP Fibre Port and 2.5 GbE
RG-RAP6260(H)-D



Matchmaster
For the Best

Routing	NAT	Yes
	Static IP Address	Yes
	DHCP Server	Yes
	PPPoE Client	Yes
	PPPoE Dial-up	
AP Mesh	Reeyee Mesh	Yes
	Mesh Management	Yes
Standalone Portal	Bandwidth Limit	Yes
	Captive Portal	Yes
	Data Quota	No
Management and Maintenance	Default Access/Password	Yes
	No. of APs on a Self-Organizing Network	300
	Unified Networking for All Network Equipment	Yes
	Local or Remote Management via Ruijie Reeye App	Yes
	Local Management via the Web Interface	Yes
	Remote Management via Ruijie Cloud	Yes
	SNMP	Yes
Platform Management Features	Optimization of Channel, Transmit Power, and Management Frame Power Settings. Both Pre- and Pro-Optimization Settings are Displayed.	Yes
	Unified Configuration via Ruijie Cloud	Yes
	Unified Monitoring via Ruijie Cloud	Yes
Others		
Flash	Flash	256MB
Memory	Memory	512MB
Color of AP Enclosure	Color of AP Enclosure	Warm White