

SPLITTER SD504F

PRODUCT DESCRIPTION

Splitter SD504F is designed for splitting 5 input lines (4 SAT and 1 terrestrial TV) into 2 paths.  
The splitter meets shielding requirements of class A according standard EN 50083-2.  
The splitter is intended for indoor use only.

SAFETY INSTRUCTIONS

Installation of the splitter must be done according IEC60728-11 and national safety standards.  
Any repairs must be done by a qualified personnel.  
No naked flame sources, such as lighted candles, should be placed on splitter.

MOUNTING

The splitter must be fixed with steel screws Ø 4-5 mm. The screws are not included in a package.

OPERATING

Splitter SD504F consists of 5 highly isolated splitters for every input line. Splitter distribute signals into two equal parts, maintaining line matching properties and isolation between different paths.  
Connectors on splitter can accept cables with central pin diameter up to 1.2 mm.  
The next diagrams demonstrates DC pass features for every line.

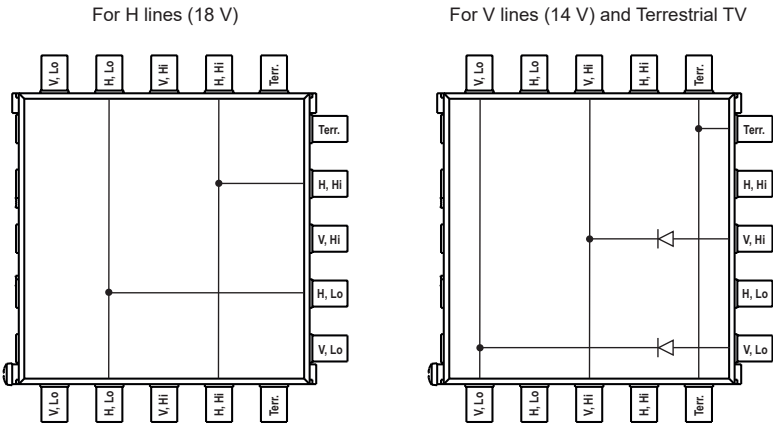


Figure 1. DC pass diagrams

TECHNICAL CHARACTERISTICS

Frequency range	SAT IF	950-2400 MHz
	Terr. TV	5-862 MHz
Through loss	SAT IF	4 dB
	Terr. TV	4 dB
Tap loss	SAT IF	4 dB
	Terr. TV	4 dB
SAT inputs decoupling	SAT IF	30 dB
	Terr. TV	30 dB
DC pass through	V line	0.5 A max.
	H line	1 A max.
	Terr. TV line	0.1 A max.
Return loss		> 10 dB
Operating temperature range		-20° ÷ + 50° C
Dimensions/Weight (packed)		126x135x30 mm/0.44 kg



This product complies with the relevant clauses of the European Directive 2002/96/EC. The unit must be recycled or discarded according to applicable local and national regulations.



Equipment intended for indoor usage only.



Functional grounding. Connect to the main potential equalization.



This product is in accordance to following norms of EU: EMC norm EN50083-2, safety norm EN60065, RoHS norm EN50581.



This product is in accordance with Custom Union Technical Regulations: "Electromagnetic compatibility of technical equipment" CU TR 020/2011, "On safety of low-voltage equipment" CU TR 004/2011.



This product is in accordance with safety standard AS/NZS 60065 and EMC standards of Australia.

SPLITTER SD504F

PRODUCT DESCRIPTION

Splitter SD504F is designed for splitting 5 input lines (4 SAT and 1 terrestrial TV) into 2 paths.  
The splitter meets shielding requirements of class A according standard EN 50083-2.  
The splitter is intended for indoor use only.

SAFETY INSTRUCTIONS

Installation of the splitter must be done according IEC60728-11 and national safety standards.  
Any repairs must be done by a qualified personnel.  
No naked flame sources, such as lighted candles, should be placed on splitter.

MOUNTING

The splitter must be fixed with steel screws Ø 4-5 mm. The screws are not included in a package.

OPERATING

Splitter SD504F consists of 5 highly isolated splitters for every input line. Splitter distribute signals into two equal parts, maintaining line matching properties and isolation between different paths.  
Connectors on splitter can accept cables with central pin diameter up to 1.2 mm.  
The next diagrams demonstrates DC pass features for every line.

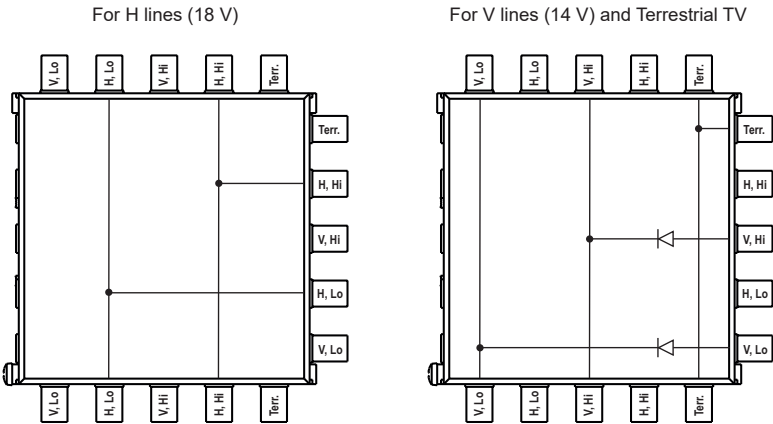


Figure 1. DC pass diagrams

TECHNICAL CHARACTERISTICS

Frequency range	SAT IF	950-2400 MHz
	Terr. TV	5-862 MHz
Through loss	SAT IF	4 dB
	Terr. TV	4 dB
Tap loss	SAT IF	4 dB
	Terr. TV	4 dB
SAT inputs decoupling	SAT IF	30 dB
	Terr. TV	30 dB
DC pass through	V line	0.5 A max.
	H line	1 A max.
	Terr.TV line	0.1 A max.
Return loss		> 10 dB
Operating temperature range		-20° ÷ + 50° C
Dimensions/Weight (packed)		126x135x30 mm/0.44 kg



This product complies with the relevant clauses of the European Directive 2002/96/EC. The unit must be recycled or discarded according to applicable local and national regulations.



Equipment intended for indoor usage only.



Functional grounding. Connect to the main potential equalization.



This product is in accordance to following norms of EU: EMC norm EN50083-2, safety norm EN60065, RoHS norm EN50581.



This product is in accordance with Custom Union Technical Regulations: "Electromagnetic compatibility of technical equipment" CU TR 020/2011, "On safety of low-voltage equipment" CU TR 004/2011.



This product is in accordance with safety standard AS/NZS 60065 and EMC standards of Australia.